

Product Datasheet

OEM Reader Module

int. antenna

Article No : TLM- 20



The TECTUS Mini Reader Modules are fully integrated low cost readers at minimized dimensions, focused to access control and time & attendance applications

The TECTUS TLM-20 is already equipped with an integrated antenna, making it a plug & play EM410x (Sokymat UNIQUE) reader.

TLM-20 Mini Reader Module comes already with a wide variety of selectable data transmission protocols, like wedge (ASCII), wiegand26 and magnetic stripe (ABTRKII).

<p>Frequency</p> <p>Antenna</p> <p>Read Distance</p> <p>Housing</p> <p>Dimensions</p> <p>Supply Voltage /Current</p> <p>Operating Temperature</p> <p>Interfaces</p> <p>Transponder types</p> <p>Technical Certificates</p> <p>Features</p>	<p>125 kHz +/- 2,5 (at RT)</p> <p>Integrated Antenna</p> <p>Short range (up to 100mm with ISO cards)</p> <p>Plastic, IP67 with 9x PIN-OUT</p> <p>26 x 25 x 7 mm (1 x 1 x 1/4 inches)</p> <p>4.5 to 5.5 VDC /13mA</p> <p>-20°C to +50°C (-4F to +122F)</p> <p>wedge (serial TTL); Wiegand 26 and magstripe ABA track II</p> <p>Read only: EM410x (Sokymat Unique) OTP : Q5, HT-S (EM410x Mode)</p> <p>CE</p> <ul style="list-style-type: none"> • Most common interfaces for access control /time & attendance are implemented • Interface selection via pin-out • LED or beeper control pin • Needs just 5V DC and an external antenna to become an OEM reader • Provides an excellent reading performance, without adding external circuitry • Low cost, small size • Shortest possible design-in phase
---	--


TECTUS IDentification Systems AG

TAG TECHNOLOGY srl

Via Don Locatelli 51
20040 RONCELLO (MI) ITALY
Phone +39 039 6957454
Fax +39 039 6820475
info@tagtechnology.it - www.tagtechnology.it

TECTUS reserves the right to change any information or data in this document without prior notice. The distribution and the update of this document is not controlled. TECTUS declines all responsibility for the use of products with any other specifications but the ones mentioned above. Any additional requirement for a specific customer application has to be validated by the customer himself at his own responsibility. Where application information is given, it is only advisory and does not form part of the specification.

Pin Out

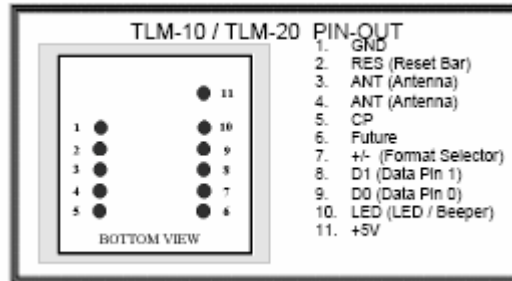

Pin Description

Pin No.	Description	ASCII	Magnet Emulation	Wiegand26
Pin 1	Zero Volts and Tuning Capacitor Ground	GND 0V	GND 0V	GND 0V
Pin 2	Strap to +5V	Reset Bar	Reset Bar	Reset Bar
Pin 3	To External Antenna and Tuning Capacitor	Antenna	Antenna	Antenna
Pin 4	To External Antenna	Antenna	Antenna	Antenna
Pin 5	Card Present	No function	Card Present	No function
Pin 6	Future	Future	Future	Future
Pin 7	Format Selector (+/-)	Strap to GND	Strap to Pin 10	Strap to +5V
Pin 8	Data 1	CMOS	Data	One Output
Pin 9	Data 0	TTL Data (Inverted)	Clock	Zero Output
Pin 10	3.1 kHz Logic	Beeper / LED	Beeper / LED	Beeper / LED
Pin 11	DC Voltage Supply	+5V	+5V	+5V

Order Number

TLM-20.aa

TECTUS IDentification Systems AG

TAG TECHNOLOGY srl

Via Don Locatelli 51
 20040 RONCELLO (MI) ITALY
 Phone +39 039 6957454
 Fax +39 039 6820475
 info@tagtechnology.it - www.tagtechnology.it

TECTUS reserves the right to change any information or data in this document without prior notice. The distribution and the update of this document is not controlled. TECTUS declines all responsibility for the use of products with any other specifications but the ones mentioned above. Any additional requirement for a specific customer application has to be validated by the customer himself at his own responsibility. Where application information is given, it is only advisory and does not form part of the specification.